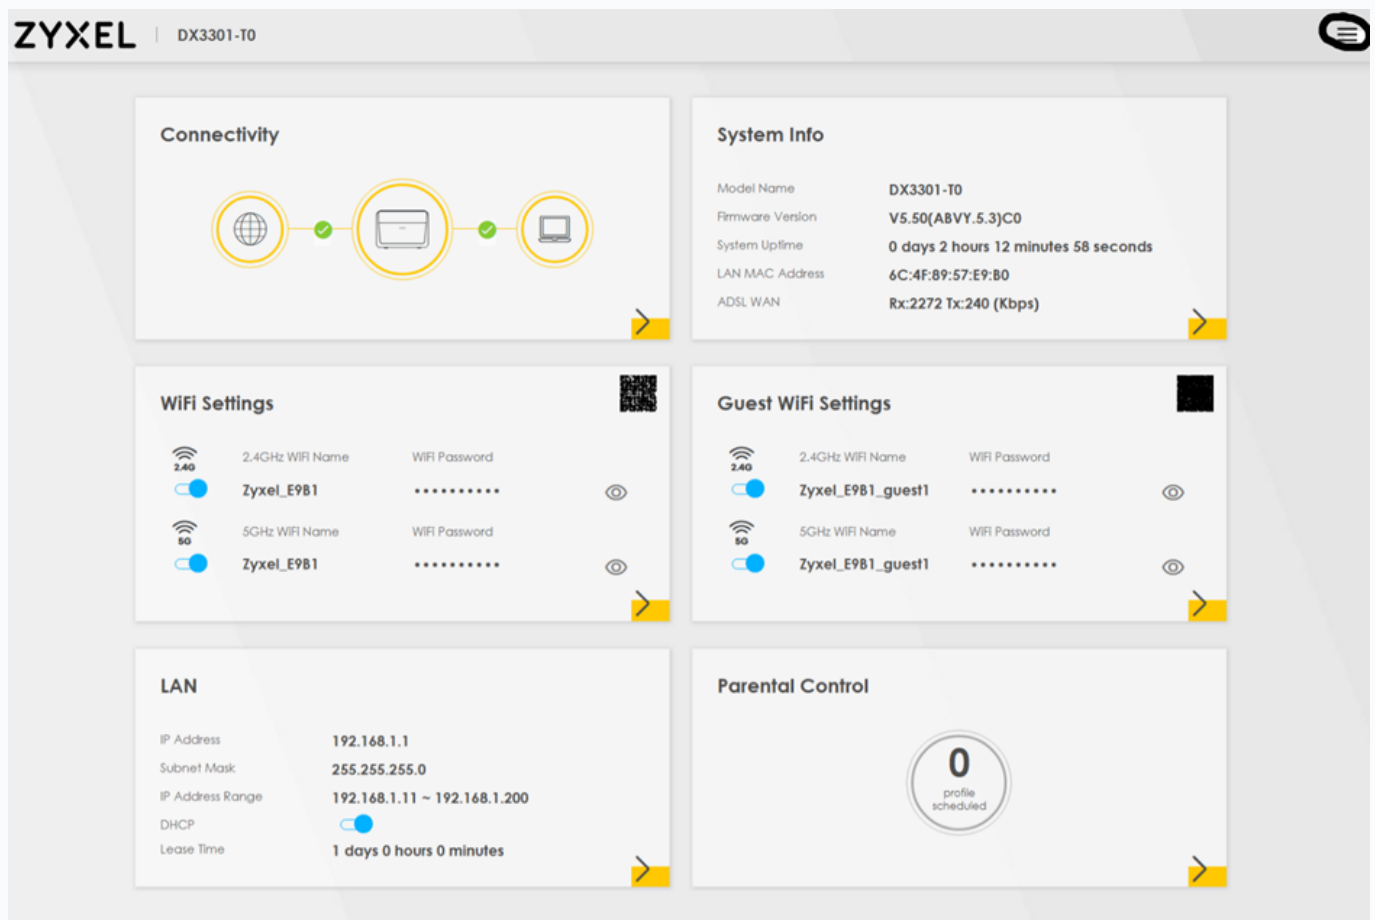


Zyxel DX3301 - Enabling/Disabling NAT

- Navigate to the three lines icon menu in the top-right corner.





- Select **Network Setting**, then **Broadband**.
- Select **Modify** on the interface you wish to edit.

Broadband Cellular Backup Advanced

Use this screen to change your Zyxel Device's Internet access settings. The summary table shows you the configured WAN services (connections) on the Zyxel Device. Use information provided by your ISP to configure WAN settings.

 Add New WAN Interface

#	Name	Type	Mode	Encapsulation	802.1p	802.1q	IGMP Proxy	NAT	Default Gateway	IPv6	MLD Proxy	Modify
1	Office	ATM	Routing	PPPoA	N/A	N/A	Y	Y	Y	N	N	 

- You can then make the necessary changes.
- Toggle **NAT** on or off as required, then click **Apply**.



Edit WAN Interface

General

Name

Type

Mode

Encapsulation

IPv4/IPv6 Mode

PPP Information

PPP User Name

PPP Password

PPP Connection Trigger Auto Connect On Demand

PPPoE Passthrough

ATM PVC Configuration

VPI [0-255]

VCI [32-65535]

Encapsulation

Service Category

IP Address

Obtain an IP Address Automatically

Static IP Address

DNS Server

Obtain DNS Info Automatically

Use Following Static DNS Address

Routing Feature

NAT IGMP Proxy

Apply as Default Gateway Fullcone NAT

6RD

Cancel

Apply